

Device Marking Conventions

National Semiconductor marks devices sold in order to provide device identification and manufacturing traceability information. The method of presenting the information marked on the device is dependent on the size of the device package and the area available for marking, as well as the nature and specifications of the device.

The information presented here describes the majority of the device markings a customer will observe. Specific package marking for a given device is given in the datasheet for that device. A package may have up to four lines of marking. The following information is usually contained in each line.

First line: Manufacturing information

- Company logo
- Wafer and/or assembly plant codes (optional) (see *Table 1* and *Table 2*)
- Date code (see *Table 4*, *Table 5*, and *Table 6*)
- Die run (wafer lot) code

Second Line: Device part number

- Device family (see *Table 7*)
- Device type
- Options
- Package code (see *Table 8*)

Third or fourth line: Optional, depending on device, package size, and customer

- Continuation of device identification (if too long for the second line)
- "Stampoff" number as required by specific customer request and specification
- Notice(s) related to copyright or trademarks

Very small packages, such as SOT-23, SOT-223, SC70, and SC90, are too small to contain all the information discussed above. Device identification marking is assigned differently, consisting of a four-character code:

- Device type (see *Table 10*)
- Device identification code
- Grade

These small packages also have a date code mark on the underside of the package. This is a one-character alpha code that represents a particular 6-week period during a 3-year span.

The specific marking for a given device can be found in the device datasheet. Other date code information, which would be typically found in the "first line" marking, is identified on the container labels.

Figure 1, *Figure 2*, and *Figure 3* show the typical arrangement of marking on large, medium, and very small packages. Codes that are most often used in the device marking are listed in the following tables. For chip scale packaged devices and all other recent updates, please refer to www.national.com/packaging.

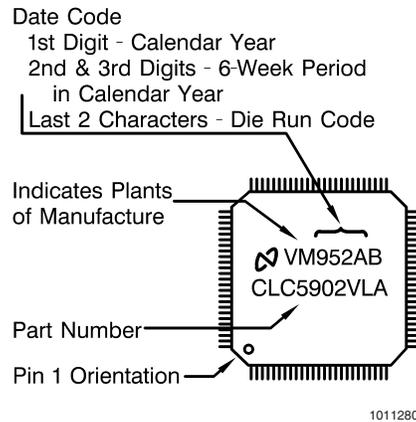


FIGURE 1. Marking Convention for Larger Packages

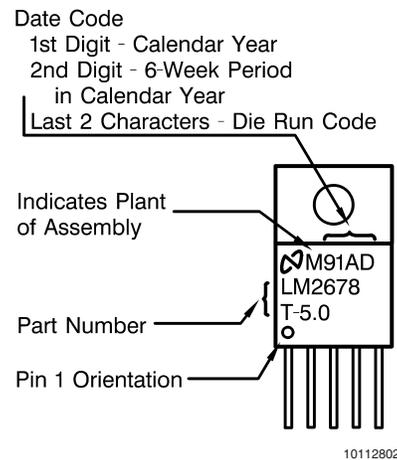


FIGURE 2. Marking Convention for Smaller Packages

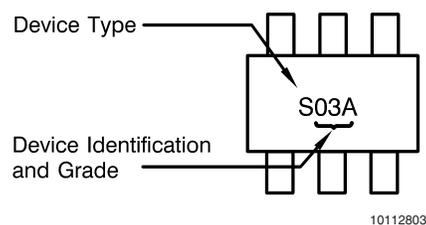


FIGURE 3. Marking Convention for Very Small Packages

Wafer Fab and Assembly Plant Codes

Table 1 lists single-letter codes for National Semiconductor's wafer fabrication plants. Letters that are not in this list indicate wafer fabrication at one of National Semiconductor's approved sub-contractors.

TABLE 1. Wafer Fab Plant Code

Code	Fab Location
E	Arlington, TX
J	Greenock, UK
R	Santa Clara, CA
V	South Portland, ME
X	Arlington, TX
0	Multiple Fab Origin
1	USA (Sub-con)
2	Taiwan (Sub-con)
3	USA (Sub-con)
8	Singapore (Sub-con)
M	USA (Sub-con)
N	Israel (Sub-con)
P	China (Sub-con)
W	Japan (Sub-con)
Z	USA (Sub-con)

Table 2 lists single-letter codes for National Semiconductor's device assembly plants. Letters that are not in this list indicate device assembly at another of National Semiconductor's approved sub-contractors see Table 3.

TABLE 2. Assembly Plant Code NSC Assembly Sites

Code	Assembly Location
F	Santa Clara, CA
C	China
M	Malacca, Malaysia
S	Singapore

TABLE 3. Assembly Plant Code Sub-Contractors

Code	Assembly Location
B	Thailand
E	Korea
H	Philippines
J	Japan
K	Hong Kong
N	Malaysia
P	Malaysia
R	Malaysia
T	Taiwan
U	China
V	Malaysia
X	USA
Y	Malaysia

Date of Manufacture Codes

Marks indicating the date of manufacture occur in four, three, two, or one digit versions. The date code represents a six-week period in which the device was assembled. The one-digit code is an alpha code for the very small packages, such as SOT, SC70, and SC90, and ranges from A to Z plus the character @, representing a 6-week period during a 3-year span. For the four, three, and two digit codes, the allocation of digits between year and week information in each scheme is summarized in Table 4:

TABLE 4. Year Code

Version	Year Digits	Week Range Digits
Four-digit (YYWW)	2	2
Three-digit (YWW)	1	2
Two-digit (YW)	1	1

Year: The year code is the last one or two digits of the calendar year of manufacture. For example, a device manufactured in 1999 would have a one-digit code of "9" or a two-digit code of "99".

Week: The week code is based on the starting calendar week of the six-week period during which the device was assembled. Table 5 summarizes the six-week date code schedule for one- and two-digit codes.

TABLE 5. Six-Week Period Code

Six-Week Period		Two-Digit Code	One-Digit Code
From Week	To Week		
52	05	52	9
06	11	06	1
12	17	12	2
18	23	18	3
24	29	24	4
30	35	30	5
36	41	36	6
42	47	42	7
48	51	48	8

Some example date codes are shown in Table 6:

TABLE 6. Date Code Examples

Date of Manufacture	4-Digit Code	3-Digit Code	2-Digit Code
Calendar week 48, 1999	9948	948	98
Calendar week 6, 2000	0006	006	01
Calendar week 14, 2000	0012	012	02
Calendar week 32, 2001	0130	130	15

Die Run (Wafer Lot) Codes

The die run code is a two letter alpha code, ranging from AB through ZZ for each device, that is automatically assigned to each lot by an internal manufacturing system. When the date code is combined with the die run code, a unique identifier is created. In case of any problems with a device, this identification facilitates backward traceability to manufacturing processes where containment and corrective actions can be defined. These actions, in turn, minimize, and eventually eliminate, any negative impact on customers.

Device Family and Package Codes

TABLE 7. Device Family

ADC, ADCV	Data Conversion
CLC	Comlinear Products
COP	Control Oriented Processor
DAC	Data Conversion
DS, DSV	Interface Products
FPD	Flat Panel Devices
LF	Linear (Bi-FET™)
LM	Linear (Monolithic)
LMC	Linear CMOS
LMD	Linear DMOS
LMF, MF	Linear Monolithic Filter
LMH	Linear Monolithic High Speed
LMS	Linear Second Source
LMV	Linear Low Voltage
LMX	Wireless
LP	Linear Low Power
LPC	Linear CMOS (Low Power)
LPV	Linear Low Power, Low Voltage
SC	Digital Cordless Telephony
SCAN	JTAG Products
TP	Telecom Products

TABLE 8. Package Type

BP	Micro Surface-Mount Device (MicroSMD)
D, DA, DH	Ceramic Sidebrazed Dual-In-Line Package
DT, TD	Molded D-Pak (TO-252)
EA, E	Ceramic Leaded Chip Carrier (LCC)
EL	Ceramic Quad Flatpack (CQFP, CQJB)
H, HA	3-Lead Metal Can (TO-46, TO-39)
J, JA	Ceramic Dual-In-Line Package (CerDIP)
K, KA, KC, KS	TO-3 Metal Can (Steel)
LD, LQ, LQA	Leadless Leadframe Package (LLP)
M, MA	Molded Small Outline Package (SO, SOT)

M3, M5, M6, MF	Molded Small Outline Package (SOT-23)
M7, MG	SC70
MB, MBH, MBS, MDA, MDB	Thin Small Outline Package (TSOP)
MC	Ceramic Small Outline Package (CSOP)
MEA, MEB, MEC, MED, MQ, MQA, MS, MSA, MSC	Molded Shrink Small Outline Package (SSOP)
MH, MXP	TSSOP with exposed pad
MJ	Molded surface mount with J-bend (SOJ)
MM	Miniature Molded Small Outline Package (MSOP, Mini SO)
MP	Molded Small Outline Package (SOT-223)
MTB, MTC, MTD, MTE	Molded Thin Shrink Small Outline Package (TSSOP)
MW, WM	Wide Body Molded Small Outline Package (SO, SOT)
MWA	Power Small Outline Package (PSOP)
N, NA	Molded Dual-In-Line Package (DIP)
P, PA, TB	Molded TO-202 Power Package
S, TS	Molded Power Surface Mount Package (TO-263)
SL, SLB	Chip Scale Packaging (CSP) Laminate
SM, SLC	Ball Grid Array (BGA)
T, TA	Molded TO-220 Power Package
TF	Molded TO-220 Power Package With Isolated Tab
U, UA, UC	Ball Grid Array (BGA)
U, UE	Ceramic Pin Grid Array (CPGA)
UP	Plastic Pin Grid Array (PPGA)
V, VA	28 & 44-Lead Molded Plastic Leaded Chip Carrier (PLCC)
V, VV, VW, VY	Leaded Quad Flat Pack (LQFP)
VC, VD, VE, VF, VH, VI, VJ, VK, VM, VN, VO, VP	Molded Plastic Quad Flat Package (PQFP)
VS, VT, VU	Molded Plastic Thin Quad Flat Package (TQFP)
W, WA	Ceramic Flatpack
W, WQ	Ceramic Quad Flatpak
WG	Ceramic Small Outline Package and Quad Flatpak with Gullwing Lead Form
YA	TQFP with exposed pad
Z, ZA, R	Molded 3-Lead Transistor Package (TO-92)

Device Family and Package Codes

(Continued)

TABLE 9. Package Type — CLC Products

E	Molded Small Outline Package (SO, SOT)
Q	Molded Plastic Leaded Chip Carrier (PLCC)

Small Surface-Mount Package Marking

For packages such as SOT23 (3-, 5-, and 6-lead), SOT223, and MSOP, there is insufficient space to mark the entire part number, so a four-character code is used instead. The first character represents the device type (see *Table 10*). The second two characters are a code relating to the device part number and options. The fourth character relates to device

performance grade. This four-character “top mark” is usually fully specified in the device datasheet, for all options and grades of the product.

TABLE 10. Device Type Code

A	Amplifier
B	Buffer
C	Comparator
D	Driver
H	Comlinear
L	Low-Dropout Linear Regulator
R	Voltage Reference
S	Switched-Capacitor Voltage Converter
T	Temperature Sensor
Z	Audio

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no “Banned Substances” as defined in CSP-9-111S2.

Leadfree products are RoHS compliant.



National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560